Built-In Refrigerator

E42BS75EPS professional series

True Built-In Side-By-Side
Flush stainless steel dispenser fascia, toe kick and grille cover blend harmoniously with the exterior of this slim profile refrigerator to create a true built-in look.

Express Ice™
Creates ice according to your family's needs with the touch of a button.

PureAdvantage™ Water Filtration System
The most advanced water filtration system available offers cleaner, fresher ice and water. A status light alerts when the filter needs to be replaced, then with one touch, the drip-free cartridge can be exchanged.

Dynamic Cool™ with CustomSet™ Digital Temperature Control System
Sensor-controlled chilling with dual evaporator cooling system. Amazingly consistent interior temperature will keep your food fresher longer.

42" BUILT-IN REFRIGERATOR

CAPACITIES	
Total Capacity	25.2 Cu. Ft.
Fresh Food Volume	15.6 Cu. Ft.
Freezer Volume	9.6 Cu. Ft.
EXTERIOR	
Ice/Water Dispenser –	
Electronic Touch Control	Yes
Night Light	Yes
Temperature Display	Yes
Crushed/Cubes/Water	Yes
Express Ice™	Yes
Lock	Yes
Filter Reset	Yes
Interior Easy Access Door	Yes
FRESH FOOD CONVENIENCES	
Filtration System	PureAdvantage™
Filter Location	Front
Door Ajar Alarm	Yes
Encapsulated Sliding Glass Shelves	3
Smooth-Glide™ Crisper Drawers	3
Humidity Controls	2
1-Gallon Fixed Door Bin	1
2-Liter Adjustable Door Bin	3
Dairy Compartment with Clear Door	1
Door Bin Snuggers	3
Theatre Lighting	Yes
Dynamic Cool™ Digital Temperature Control System	Yes
FREEZER CONVENIENCES	
Automatic Ice Maker with Ice Server	Factory Installed
Smooth-Glide™ Baskets	2
Fixed Door Bin	3
Dual-Level Lighting	Yes
INSTALLATION	
Adjustable Rollers	Yes
Door Stops	Yes
SPECIFICATIONS	
Overall Exterior Dimensions –	
Height	84"
Width	42"
Depth (Including Handle) (with 90° Door Open)	26-7/8" 47-7/8"
Power Cord Location	Right Top Rear
Water Line Inlet Location	Left Bottom Front
Voltage Rating	120V/60Hz/15 or 20A
Connected Load (kW Rating) @ 120 Volts‡	0.65
Product Weight	610 Lbs.
Shipping Weight (Approx.)	630 Lbs.

‡For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and/or national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxicon.com.

Specifications subject to change.

Built-In Refrigerator

E42BS75EPS professional series

Electrolux | ICON™

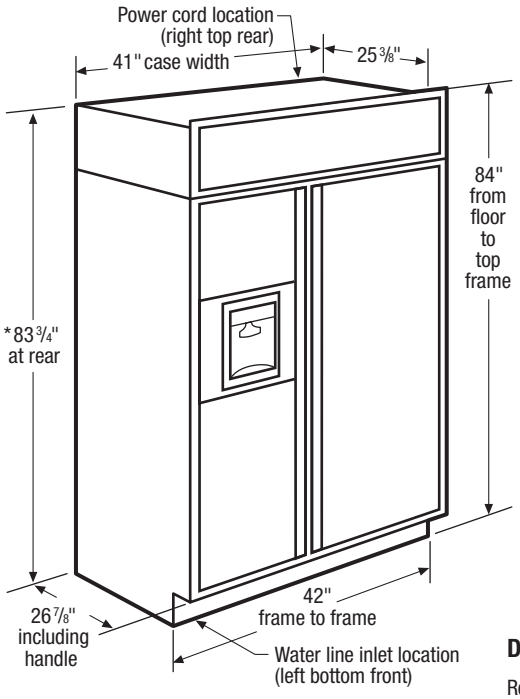

*Shipping height. (Front height may be adjusted from 83-1/2" to 84-1/2" by adjusting leveling legs a max. of 1".)

Cutout Dimensions

(A) Finished opening:
83 1/2" min.
84 1/2" max.

(B) 41 1/2"

(C) 24"



Door-Swing Clearances

Refrigerator equipped with 2-position door stop. Factory set to 130°, adjustable to 90° if clearance to adjacent cabinets or wall is restricted.



Notes:

A 4" min. door clearance is required when using 90° door stop position. Drawer access is maintained, but removal is restricted. To determine door swing interaction with adjacent cabinets and countertops refer to Product Installation Guide on web at *electroluxicon.com*.



42" Built-In Refrigerator Specifications

- Product Weight – 610 Lbs.
- Voltage Rating – 120V / 60 Hz / 15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 0.65 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 5.4 Amps
- Always consult local and/or national electric & plumbing codes.
- Cutout must be prepared with electrical and water supply located as shown. When possible, recess copper water line and electrical outlet.
- Water line can enter opening through floor or rear wall. Copper tubing recommended between cold water line and water connection location. Water line tubing recommended is 48" minimum length by 1/4" diameter. Installation of easily accessible shutoff valve in water line required.
- Optimum door swing factory set for 130°. When installing next to wall where handle may make contact, allow 4" minimum clearance for 90° door swing. At 90° door stop position, drawer access will be maintained but removal will be restricted.
- Refrigerator must be placed on level surface of hard material, same height as flooring. Surface must support approximately 1500 Lbs. when fully loaded. Unit equipped with 4-point leveling.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions.

The Electrolux Group

USA • 250 Bobby Jones Expressway • Augusta, GA 30907 • 1-877-4electrolux (1-877-435-3287) • **electroluxicon.com**
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • **electroluxicon.ca**

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

© 2008 Electrolux Home Products, Inc.